## (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 11 April 2002 (11.04.2002)

**PCT** 

(10) International Publication Number WO 02/29141 A1

(51) International Patent Classification7: D04H 1/42, D01D 5/40

D01F 4/02,

(74) Agent: SANDRI, Sandro; Europatent-Euromark Srl, Via

(21) International Application Number:

PCT/IT01/00501

(22) International Filing Date:

28 September 2001 (28.09.2001)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: VR2000A000096

2 October 2000 (02.10.2000) IT

(71) Applicant (for all designated States except US): CON-SORZIO PER GLI STUDI UNIVERSITARI [IT/IT]; Via dell'Artigliere, 8, I-37129 Verona (IT).

(71) Applicants and

(72) Inventors: ARMATO, Ubaldo [IT/IT]; Via Linate, 40, I-36030 Caldogno (IT). DAL PRA, Ilaria [IT/IT]; Via Linate, 40, I-36030 Caldogno (IT). KESENCI, Kemal [TR/TR]; Ocaki Mah. Binbasilar Meukli 9, Dörtyol-Hatay (TR). MIGLIARESI, Claudio [IT/IT]; Via Cesarini, 25, I-38040 Trento (IT). MOTTA, Antonella [IT/IT]; via Legnano, 8, I-20121 Milano (IT).

Locatelli, 20, I-37122 Verona (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,

HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THE PREPARATION OF A NON-WOVEN SILK FIBROIN FABRICS

(57) Abstract: A process for producing non-woven silk fiber fabrics comprises the following steps: a) obtaining silk fibroin, for example either from silk cocoons, or silk textiles or waste silk; b) removing the sericin layer covering the silk fibroin fibers, when present; c) breaking the disulfide bonds between heavy (350 kDa) and light (27kDa) chains of silk fibroin in order to obtain the production of chain fragments which serve as a specific cellular recognition sites promoting the attachment and growth of cells. d) homogenising of the material resulting from step c).

METHOD FOR THE PREPARATION OF A NON-WOVEN SILK FIBROIN FABRICS

\*\*\*\*\*

10

5

# TECHNICAL FIELD

The present invention relates to a method for the preparation of silk fibroin non-woven fabrics. More specifically, the present invention refers to a method for the preparation of silk fibroin non-woven fabrics forming structures suitable to be used as implant biomaterials, cell culture scaffolds for tissue engineering applications, cell carriers and even biological fluid-filtering systems and protein adsorption.

## BACKGROUND ART

The theory underlying tissue engineering applications essentially consists in combining a natural or synthetic matrix with cells from specific tissue source, in such a way that said cells may be grown in a laboratory and then transplanted into a human body.

Moreover, by using implant materials able to 30 positively interact with cells, specific tissue regeneration processes can be initiated and the de novo formation of whole tissue structures achieved. In many instances, such regenerated tissues will be capable of performing their normal functions eventually lost

PCT/IT01/00501 WO 02/29141

2

because of previously suffered damages.

10

15

20

25

30

Silk fibroin is a bio-material that can be used in surgery as implant material as well as for tissue engineering applications. In this context it is proper 5 to remark that silk fibroin has very good properties such high strength coupled with flexibility, blood compatibility, water permeability and permeability to oxygen; all this makes silk fibroin an excellent candidate for biomedical applications as either in the form of non-woven membranes and fibers or in the form of woven membranes and fibers.

Silk fibroin makes up 75% to 80% by weight of the raw silk. The silk content of the protein sericin, which surrounds the two kinds of fibroin filaments, varies from 20% to 25% by weight depending on the species, origin, and culture conditions of the raw silk.

Silk fibroin is a fibrous protein whose hierarchical structure consists of fibrils and micro-fibrils, in which the fibers are arranged in a highly oriented crystalline form.

Silk fibroin easily dissolves in a saturated aqueous solution of inorganic salts.

By desalting such a solution by dialysis, an aqueous solution of silk fibroin could be obtained.

Due to the alfa-elix structure of fibroin, these solutions are not stable, and the structure of the regenerated membrane that is obtained from these solutions can be easily changed by polar solvents, ageing, and physical forces (shear, vibration, mixing etc.).

In order to obtain silk fibroin, it is possible to use silk in the form of cocoons, silk textiles and waste silk.

The raw silk filament is not soluble in formic acid

3

due to the presence of an external sericin layer.

In order to eliminate the sericin layer, silk must be first degummed.

With the term "degumming", the partial or complete removal of the sericin that covers the two types of fibroin filaments is intended.

The degumming agents commonly used are mainly alkali-free soaps.

According to a degumming method known in the art, silk is treated in a soap bath at 95-98°C for a period of 2-4 hours, depending on the quality and type of the fabric.

The use of silk fibroin as a cell culture matrix is already known (see for example the Italian Patent Application No. VR99A000082), as a burn wound dressing 15 membrane (N. Minoura, M. Tsukada, M. Nagura, "Physicochemical properties of silk fibroin membrane as a biomaterial" Biomaterials, 11, 430-434, 1990), as an enzyme-immobilization material (M. Demura, T. Asakura, T. Kuroo, "Immobilization of biocatalyst with Bombix mori 20 silk fibroin by several kinds of physical treatment and its application to glucose sensors", Biosensors, 361-372, 1989), and an oral dosage form ù(T. Hanawa, A. Wanabe, T. Tsuchiya, R. Ikoma, M. Hidika, M. Sugihara, "New oral dosage form for elderly patients: Preparation 25 and characterization of silk fibroin gel", Chem. Pharm. Bull. 43, 284-288, 1995).

However, silk fibroin membranes are very brittle and their preparation is difficult and time-consuming.

30 The use of textile methods would theoretically be possible to weave using merely degummed silk fibroin fibers in order to obtain a flexible fabric.

However, preparing three dimensional structures appears to be remarkably difficult, and the adaptability

4

of a tissue obtained in such a way would not be entirely proper to the different applicative requirements in terms of specifically required mechanical attributes, structure, and even ability to interact with other 5 cells.

## DESCRIPTION OF THE INVENTION

The aim of the present invention is to provide a method for the preparation of silk fibroin non-woven fabrics formed by a meshwork of fibroin fibers in order to obtain an high flexible material which preserves unchanged at the same time the demonstrated favorable biological functions of silk fibroin.

This is achieved by the features disclosed in the 15 main claim.

The dependent claims outline particularly advantageous forms of embodiment of the method according to the invention.

Moreover, claims 13 and 14 describe a three-dimensional silk fibroin fabrics.

20

Furthermore, claims 15 and 16 describe particularly favorable uses of a three-dimensional silk fibroin fabrics.

The process according to the invention comprises the initial degumming of silk fibroin using a treatment based on a NaHCO<sub>3</sub> solution or on other methods known in the state of the art as degumming methods and described in the scientific literature.

According to the invention, the degummed silk undergoes then a treatment breaking the disulfide bonds between heavy (350 kDa) and light (27kDa) chains of silk fibroin.

Such treatment is favourably performed partially dissolving the silk fibroin in a formic acid solution.

5

Afterwards the resulting solution is homogenized and dried obtaining as a result a non-woven fabric comprising the desired properties.

Finally the fabric is washed several times in order to remove possible residues deriving from the previous treatments and kept in wet conditions until use.

According to a form of embodiment of the invention, the formic acid solution used in the process contains a small amount of a mixture of salts selected from the group comprising calcium chloride, zinc chloride, potassium chloride, lithium bromide, lithium thiocyanate, magnesium chloride, copper nitrate and sodium chloride.

10

15

20

25

30

Such added salts can be removed washing with double distilled water.

The non-woven silk fibroin fabrics according to the invention proved to allow the co-culture in vitro of normal adult human keratinocytes and fibroblasts (besides other human cell types), thus making up dermoepidermal equivalents apt for in vivo testing.

Moreover, the process according to the present invention proved the formation of bio-functional fragments that could serve as specific cellular recognition sites promoting the attachment and growth of mammalian and human cells.

# ILLUSTRATION OF DRAWINGS

Other features and advantages of the invention will become apparent from the following description of some forms of embodiment of the invention, given as a nonlimiting example, with the help of the figures illustrated in the attached drawings, in which:

- Figures 1a and 1b represent scanning electron microscopy (SEM) pictures of silk fibroin fabrics

6

made up by non-woven meshwork of fibers and fibrils bonded together. The picture of figure 1a is obtained with a 100  $\mu$ m scale, while the picture of figure 1b is obtained with a 10  $\mu$ m scale.

- 5 Figure 2 shows a typical infrared spectrum of formic acid treated silk fibroin.
  - Figure 3 shows a typical thermal gravimetric analysis of formic acid treated silk fibroin.
- Figure 4 is a picture made under fluorescence microscopy (fluorescein [FITC] optical filter set) 10 and shows scattered normal adult human fibroblasts cultured in-vitro for 10 days on a fibroin meshwork. Prior to seeding, fibroblasts were labelled with 3,3'-dioctadecyloxacarbocyanine perchlorate: thus, the living cells emit a bright 15 green fluorescence, the intensity of which peaks at about 590 nm wavelength, when excited by greenish autoultraviolet light. A weak fluorescence proper for the fibroin fibers can also be appreciated. Original magnification, 100X. 20
- Figure 5 shows the same specimen as in figure 4, but observed under the fluorescence microscope with a rhodamine optical filter set. The examination shows several islets of normal human keratinocytes, co-cultured for 4 days with the fibroblasts on the fibroin meshwork, fluoresce orange red. Prior to seeding, keratinocytes were labelled with 1,1'-dioctadecyl-3,3,3,3'-tetramethylindocarbocyanine perchlorate: thus, they are observed as spots
- perchlorate: thus, they are observed as spots emitting an intra-vital orange red fluorescence, peaking at about 500 nm wavelength, when excited by ultraviolet light. Original magnification, 100 X.

7

# DESCRIPTION OF SOME FORMS OF EMBODIMENT

As indicated above, to obtain silk fibroin, silk as cocoons, silk textiles and waste silk could be used.

Moreover since the raw silk filament is not soluble 5 in formic acid due to the presence of an external sericin layer, silk must be first degummed, to eliminate the sericin layer.

According to the invention, degummed silk is thus treated with a water-formic acid solution.

In this context, solutions having from 88% to 99% by weight of formic acid could be used, with the 99-weight percent formic acid solutions being preferred.

In accordance with a preferred form of embodiment of the process the silk fibroin is dipped into formic acid at room temperature; nevertheless, the process can be carried out at higher temperatures, for example up to 60°C.

15

20

25

The experiments were carried out under a fume-hood.

According to an advantageous form of embodiment of the present invention the degree of solution of the silk fibroin can be increased in order to obtain highly tightened fabrics.

This is achieved by adding an amount from 0.1 to 10% by weight of a salt mixture selected from the group comprising calcium chloride, zinc chloride, potassium chloride, lithium bromide, lithium thiocyanate, magnesium chloride, copper nitrate and sodium chloride.

Preferably the salts to be used are calcium chloride and lithium bromide.

30 According to the invention, silk fibroin concentrations comprised between 0.1% and 10% by weight have been favourably used. The best result are obtained with concentrations between 0.5% to 5% by weight.

With reference to figures 1a and 1b, the structural

8

hierarchy of silk fibroin fibers consists of fibrils, micro-fibrils and polymer molecules.

Now, according to the present invention, the break of disulfide bonds between heavy (350 kDa) and light (27kDa) chains of silk fibroin allows the production of chain fragments which can serve as a specific cellular recognition sites promoting the attachment and growth of cells.

Characterization of the silk fibroin fabrics has been performed by using Scanning Electron Microscopy (SEM), Thermogravimetric Analysis (TGA) and Differential Scanning Calorimetry (DSC) and moreover by means of mechanical tests.

.15 EXAMPLE 1

20

25

In the following example 0.5 g of degummed silk fibroin (from cocoon, textiles or waste silk) was brought into 100 ml of a water solution of formic acid.

The resulting solution was poured onto clean glass or polystyrene dishes and then stirred at 100 rpm for 30 minutes in order to obtain homogeneously distributed fibers.

The resulting solution was left under atmospheric conditions in order to remove the formic acid.

Once the formic acid had been removed by evaporation at room temperature, the resulting silk fibroin fabrics were washed several times with double distilled water and next dried inside a vacuum oven at 50°C.

In order to increase the solubility of the silk 30 fibroin, calcium chloride was used.

Table 1 as follow reports the characteristics of some of the silk fibroin solutions used.

As can also be seen from the data of Table 1, the process in accordance with the present invention allows

9

the silk fibroin to be dissolved.

TABLE 1

*Exp. N°	Silk Fibroin (wt%)	CaCl <sub>2</sub> (wt%)	Formic acid (ml)	Solubility	Final Resulting Form
1	0.1		100	Partially soluble	Nonwoven fabrics
2	0.2	-	100	ti	п
3	0.3	_	100	n	n n
4	0.4		100	11	"
5	0.5		100	11	н
6	0.6		100	ir .	n
7	0.7	-	100	li .	11
8	0.8	-	100	11	п
9	0.8	-	100	11	n
10	1.0	-	100	ti	11
11	2.0	-	100	п	11
12	3.0	-	100	11	n
13	4.0	-	100	· 11	11
14	5.0		100	Swellable	12
15	10		100	11	ıı
16	1.0	0.5	100	Soluble	Membrane
17	2.0	1.0	100	n .	n
18	3.0	1.5	100	n	n
19	4.0	2.0	100	"	II
20	5.0	2.5	100	11	11
21	0.1	0.01	100	Soluble	11
22	0.2	0.01	100	u	
23	0.3	0.01	100	Partially soluble	Nonwoven fabrics
24	0.4	0.01	100	11	tt
25	0.5	0.01	100	n n	
26	0.8	0.01	100	100 " Nonwoven fabric:	
27	0.8	0.1	100	Soluble	Membrane

1	$\sim$
Ŧ	υ

ſ	28	0.8	0.2	100	n	11
ŀ			1		tu tu	11
	29	0.8	0.4	100		
Γ	20	10	5	100	10	ii
ı	30	10				

<sup>\*</sup>All the experiments were performed at room temperature

As can be noted from the data of Table 1, the process according to the present invention caused a homogenous, swellable, partially soluble or soluble mass that is obtained by breaking the disulfide bonds between the heavy (350 kDa) and light (27kDa) chains of silk fibroin

Some characteristic properties of the silk fibroin fabrics produced by means of the process according to the invention are given in Table 2.

TABLE 2.

	Wet State			Dry State			
Sample	Modulus	Elongation	Pore size*	Modulus	Elongation	Pore size*	
N°.	(Mpa)	(%)	(μm)	(Mpa)	(%)	(μm)	
5	35	43	30-200	500	34	50-250	
10	60	36	10-150	450	25	30-200	
15	70	40	10-100	700	27	20-100	
20	130	56	_	3000	10	-	
25	75	55	50-250	670	30	50-300	
30	120	60	-	5000	7		

<sup>\*</sup>Pore sizes as measured by SEM and optical microscopy

15

10

Tensile properties of silk fibroin are usually measured via a load-extension test.

According to the ASTM 638, all test were performed at room temperature in wet and dry states. As it can be

11

seen in Table 2, due to the water, the modulus of meshwork and membranes is increased; besides, elongation is decreased.

Morphology of the silk fibroin fabric has been also checked by SEM and optical and fluorescence microscopy. It can be clearly noted in SEM photographs that voids are distributed randomly and can be controlled by the concentration of silk fibroin or by preparing multiple layers of silk fibroin fiber structures.

Figure 2 shows a typical infrared spectrum of formic acid treated silk fibroin. It can be noted that all compositions exhibited an approximately similar FTIR spectrum; figure 2 comprises Amide I, Amide II, Amide III and Amide IV bands respectively.

15

20

Figure 3 shows a typical thermal gravimetric analysis of formic acid treated silk fibroin; such analysis was performed with the aim to check water absorption and thermal decomposition properties.

In the thermogram shown in figure 3, all samples behaved in the same way: the water content of the samples stored under environmental conditions is the range from 5 to 10% by weight, and decomposition starts to temperatures beyond 280°C.

25

#### EXAMPLE 2

A three-dimensional fibroin fiber fabric was prepared according to the following method.

A first layer 200  $\mu$ m thick with a mean pore diameter of 15  $\mu$ m was coupled to a second layer having 1200  $\mu$ m thick with a mean pore diameter of 40  $\mu$ m. The two layers were prepared separately and joined together applying a suitable pressure forming a fabric with a total thickness of 1.5 mm.

12

The material was sterilized exposing for about 30 minutes each of its two sides to ultraviolet rays emitted by bactericidal lamps contained inside a closed box at room temperature; afterwards it was cut into 2.7 x 2.9 cm square pieces that were each laid inside the square wells (8.6 square centimetres each) of 8-well Multidish plates (Nunc Ltd.).

Normal human dermal fibroblasts were isolated from an intra-operative biopsy (the patient was informed and consenting) by means of trypsin digestion (trypsin solution 0,25% p/v) of the minced dermal layer and were then numerically expanded in standard TC75 tissue culture flasks (Falcon Ltd.) containing 15 mL of Dulbecco's Minimum Essential Medium (DMEM; Sigma Chemical Co.) fortified with 5% by volume of inactivated (56° C for 30 min.) foetal bovine serum (Biowhittaker SpA).

10·

20

25

30

Prior to seeding onto the fibroin fabric, fibroblasts were detached from the bottom of the flasks, then labelled with 3,3'-dioctadecyloxacarbocyanine perchlorate, an intra-vital stain emitting a bright green fluorescence visible with an optical FITC filter set when excited by ultraviolet light (Molecular Probes Inc.), and finally counted.

About 100,000 fibroblasts were next seeded onto each square centimetre of the pieces of the just above described fibroin fabric.

Prior to seeding, the fabric pieces had been turned so that their portions endowed with larger pores looked upwards.

The specimens were then incubated at 37°C in an atmosphere of air added with CO2 (5% volume).

The fibroblasts attached immediately to the fibroin fibers and it was possible to verify a percentage of

13

fibroblasts not attaching to the fibroin fabric less than 1% of the total number of the fibroblasts seeded.

The fibroblasts proliferated intensely, as could be detected under a fluorescence microscopic examination (see fig. 4).

They were cultured and grew up for 10 consecutive weeks on pieces of fibroin fabric.

Not only their increase in numbers was detectable under the fluorescence microscope, but it was further confirmed by their increasing consumption of the glucose present in the medium.

The vitality and high anabolic metabolism of the cells was confirmed also by the practical absence of urea nitrogen (a measure of protein demolition) from the conditioned growth media.

15

20

Normal human epidermal keratinocytes isolated from an intra-operative biopsy (the patient was informed and consenting) by dispase digestion were first seeded onto a layer of previously irradiated human fibroblasts (6000 rads; feeder-layer) and expanded by exposure to a mixture 1:1 volume of MCDB 153 medium (Sigma) and Ham's F12 medium (Biowhittaker GmbH) added with 5% by volume of inactivated (56° C for 30 min) foetal bovine serum.

At 70% confluence the keratinocytes were detached from the flasks, then labelled with 1,1'-dioctadecyl-3,3,3,3'-tetramethylindocarbocyanine perchlorate, an intra-vital fluorescent stain emitting an orange-red bright fluorescence under a rhodamine optical filter set when excited by ultraviolet light (Molecular Probes 30 Inc.), and next counted.

About 100,000 keratinocytes were then seeded onto each square centimetre of the same pieces of fibroin fabrics on which human fibroblasts were already attached

In this case the tissue pieces were turned in such a

14

way that their portions with smaller pores looked upwards.

The specimens were then incubated at  $37^{\circ}\text{C}$  in an atmosphere of air added with CO2 (5% by volume).

The keratinocytes attached immediately to the fibroin meshwork of fibers as well and the percentage of the keratinocytes not adhered to the fibroin was irrelevant.

5

10

As expected, the keratinocytes grew slowly at the beginning, but after 3-4 days their growth became faster, therefore large patches of cells were formed that were easily detectable under the microscope for their intense red fluorescence and perfectly distinguishable from the co-cultured fibroblasts fluorescing in green with optical FITC filters and located in the lower layer of the fibroin meshwork (see figure 5.)

\*\*\*\*

Thus, the above description evidences that the 20 fibroin fiber fabric according to the invention allows the *in vitro* production of an entirely new type of a dermal-epidermal equivalent which may be used *in vivo* as an artificial skin.

The invention described above refers to some of its particular forms of embodiment.

However, it is clear that the invention encompasses all the modifications and variations that can be considered, without going beyond the framework of the present invention as claimed.

As an example, it is clear that, on the base of the model disclosed above, other three-dimensional non-woven fibroin fabrics can be endowed with ad hoc attributes and thus to be used as scaffolds for the engineering of other tissues (such as arteries, tendons, cartilage,

15

bone, etc) or organs (trachea, oesophagus, liver, etc.) to be grafted or connected to the organism temporarily (e.g. bio-artificial liver systems) or permanently in vivo.

16

#### CLAIMS

1. A process for producing non-woven silk fiber fabrics comprising the following steps:

5

10

15

- a) obtaining silk fibroin, for example either from silk cocoons, or silk textiles or waste silk;
- b) removing the sericin layer covering the silk fibroin fibers, when present;
- c) breaking the disulfide bonds between heavy (350 kDa) and light (27kDa) chains of silk fibroin in order to obtain the production of chain fragments which serve as a specific cellular recognition sites promoting the attachment and growth of cells.
- d) homogenising of the material resulting from stepc).
- Process according to claim 1, wherein said step b)
  is carried out either by using a treatment based on
  a NaHCO<sub>3</sub> solution or another per se known degumming
  method.
- 20 3. Process according to anyone of the preceding claims, in which said step c) is obtained by dipping the silk fibroin into a formic acid water solution.
  - 4. Process according to claim 3, wherein silk fibroin concentrations in said solution are comprised in a range between 0.1% and 10% by weight.
  - 5. Process according to anyone of claims 3 and 4, wherein said step c) is carried out at temperatures not higher than 60°C.
- 6. Process according to claim 5, wherein said step c)
  30 is carried out at room temperature.
  - 7. Process according to anyone of claims from 3 to 6, wherein the water solution contains 0.1 to 10% by weight of a mixture of salts selected from the group comprising calcium chloride, zinc chloride,

17

potassium chloride, lithium bromide, lithium thiocyanate, magnesium chloride, copper nitrate and sodium chloride.

- 8. Process according to anyone of claims from 3 to 7, wherein the homogenisation of the material resulting from said step c) is obtained by mixing the solution for a predetermined period of time.
  - 9. Process according to anyone of claims from 3 to 8, wherein the formic acid is removed from the resulting material of said step d).


10

- 10. Process according to claim 9, wherein the formic acid is removed by evaporation.
- 11. Process according to anyone of claims 9 and 10, wherein the material is washed several times with double distilled water and next dried.
- 12. Process according to claim 11, wherein drying of the material is carried out in a chamber at a predetermined and controlled temperature.
- 13. A three-dimensional fabric of silk fibroin fibers,
  20 characterized in that it is formed of a meshwork
  structure in which the bounds between heavy (350
  kDa) and light (27kDa) chains of silk fibroin are
  broken and comprises bifunctional fragments which
  serve as a specific cellular recognition sites
  25 promoting the attachment and growth of cells.
  - 14. Fabric according to claim 13, characterized in that it is obtained through a process according to anyone of claims from 1 to 12.
- 15. Use of a fabric according to anyone of claims 13 and
  14 for the bio-engineering of tissues such as for
  example skin, vessels, tendons, cartilage, bone or
  organs such as for example trachea, oesophagus,
  liver suitable to be temporarily or permanently
  interconnected or grafted to the organism.

18

16. Use of fabric variants according to anyone of claims
13, 14 and 15 commercially supplied as scaffolds
suitable to prepare three-dimensional in vitro
cultures of isolated cells or cells forming tissuelike aggregates or organoids for scientific and/or
industrial experimental investigations.

1/6

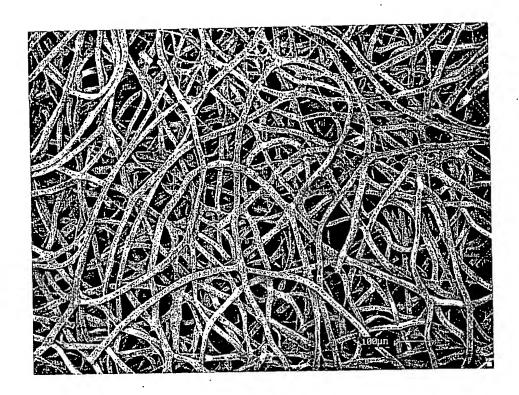

<u>Fig. 1a</u>

2/6

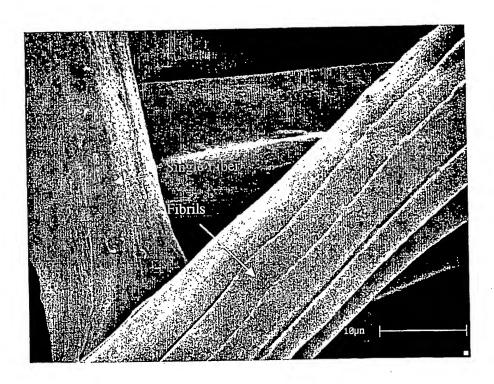


Fig. 1b

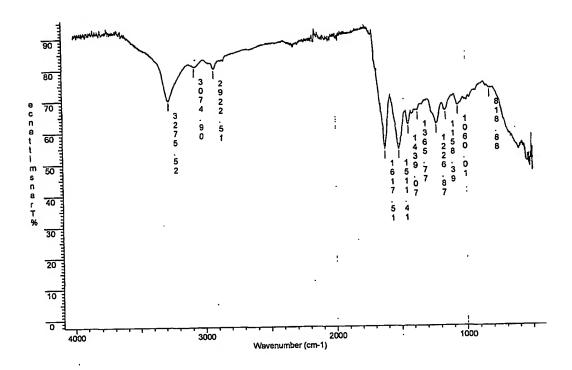


Fig. 2


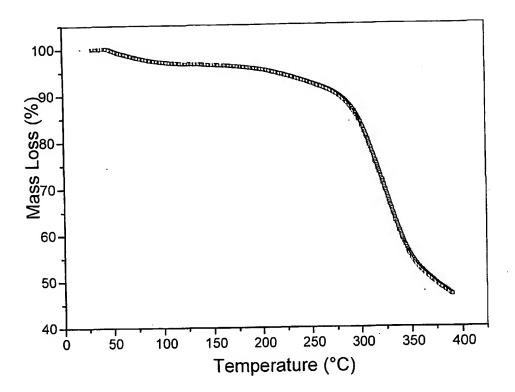


Fig. 3

5/6



<u>Fig. 4</u>

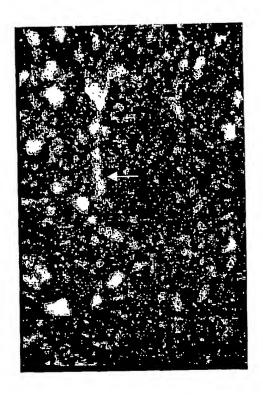

<u>Fig. 5</u>

# INTERNATIONAL SEARCH REPORT

Inter nal Application No PC1/1T 01/00501

A. CLASSIF IPC 7	FICATION OF SUBJECT MATTER D01F4/02 D04H1/42 D01D5/40		
	International Patent Classification (IPC) or to both national classificat	ion and IPC	
	SEARCHED cumentation searched (classification system followed by classification	n symbols)	<del></del>
IPC 7	DO1F DO4H DO1D		
Documentat	lon searched other than minimum documentation to the extent that su	ch documents are included in the fields se	arched
Electronic da	ala base consulted during the international search (name of data bas	e and, where practical, search terms used)	
EPO-In	ternal, WPI Data, PAJ		
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the rele	vant passages	Relevant to claim No.
Α	EP O 488 687 A (E.I. DU PONT DE N AND COMPANY) 3 June 1992 (1992-06 the whole document		1–16
Α	DE 198 41 649 A (THUERINGISCHES I TEXTIL) 27 April 2000 (2000-04-27 column 1, line 1 -column 3, line	)	1–16
A	US 976 977 A (BAUMANN C R ET AL) 29 November 1910 (1910-11-29) the whole document		3
:	<del></del>		
Furt	her documents are listed in the continuation of box C.	χ Patent family members are listed	in annex.
			•
		"T" later document published after the inte or priority date and not in conflict with	the application but
consta	ent defining the general state of the art which is not dered to be of particular relevance	cited to understand the principle or the invention	
filing o	date	"X" document of particular relevance; the cannot be considered novel or cannot	be considered to
which	ent which may throw doubts on priority claim(s) or is clied to establish the publication date of another not other special reason (as specified)	involve an inventive step when the do "Y" document of particular relevance; the o	laimed invention
'O' docum	on or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or	cannot be considered to involve an in document is combined with one or mo ments, such combination being obvious	ore other such docu-
P' docum	means ent published prior to the international filling date but han the priority date claimed	in the art.  *&* document member of the same patent	
	actual completion of the international search	Date of mailing of the international sea	
1	5 January 2002	24/01/2002	
Name and	mailing address of the ISA	Authorized officer	
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Tarrida Torrell,	J

# INTERNATIONAL SEARCH REPORT

xmation on patent family members

inter al Application No PCI/II 01/00501

Patent document cited in search report	ŀ	Publication date		Patent family member(s)		Publication date
EP 0488687	A	03-06-1992	US	5171505	A	15-12-1992
21 0 100001	,,		AŬ	637963	B2	10-06-1993
			AU	8811691	Α	04-06-1992
		•	CA	2054842	A1	29-05-1992
			CN	1061814	A,B	10-06-1992
			CN	1258767	Α	05-07-2000
			DE	69131924	D1	24-02-2000
			DE	69131924	T2	20-07-2000
			EP	0488687	A2	03-06-1992
			JP	3071014	B2	31-07-2000
			JP	4263614	Α	18-09-1992
			KR	199655	B1	15-06-1999
			NZ	240745	Α	27-04-1994
DE 19841649	Α	27-04-2000	DE	19841649	A1	27-04-2000
US 976977	Α		NONE			

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

| BLACK BORDERS
| IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
| FADED TEXT OR DRAWING
| BLURRED OR ILLEGIBLE TEXT OR DRAWING
| SKEWED/SLANTED IMAGES
| COLOR OR BLACK AND WHITE PHOTOGRAPHS
| GRAY SCALE DOCUMENTS
| LINES OR MARKS ON ORIGINAL DOCUMENT
| REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

# IMAGES ARE BEST AVAILABLE COPY.

OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.